


LASSO

DRILLING LLC

RIG 103

26,500FT
W/ 5" DRILL PIPE
TRIPLE

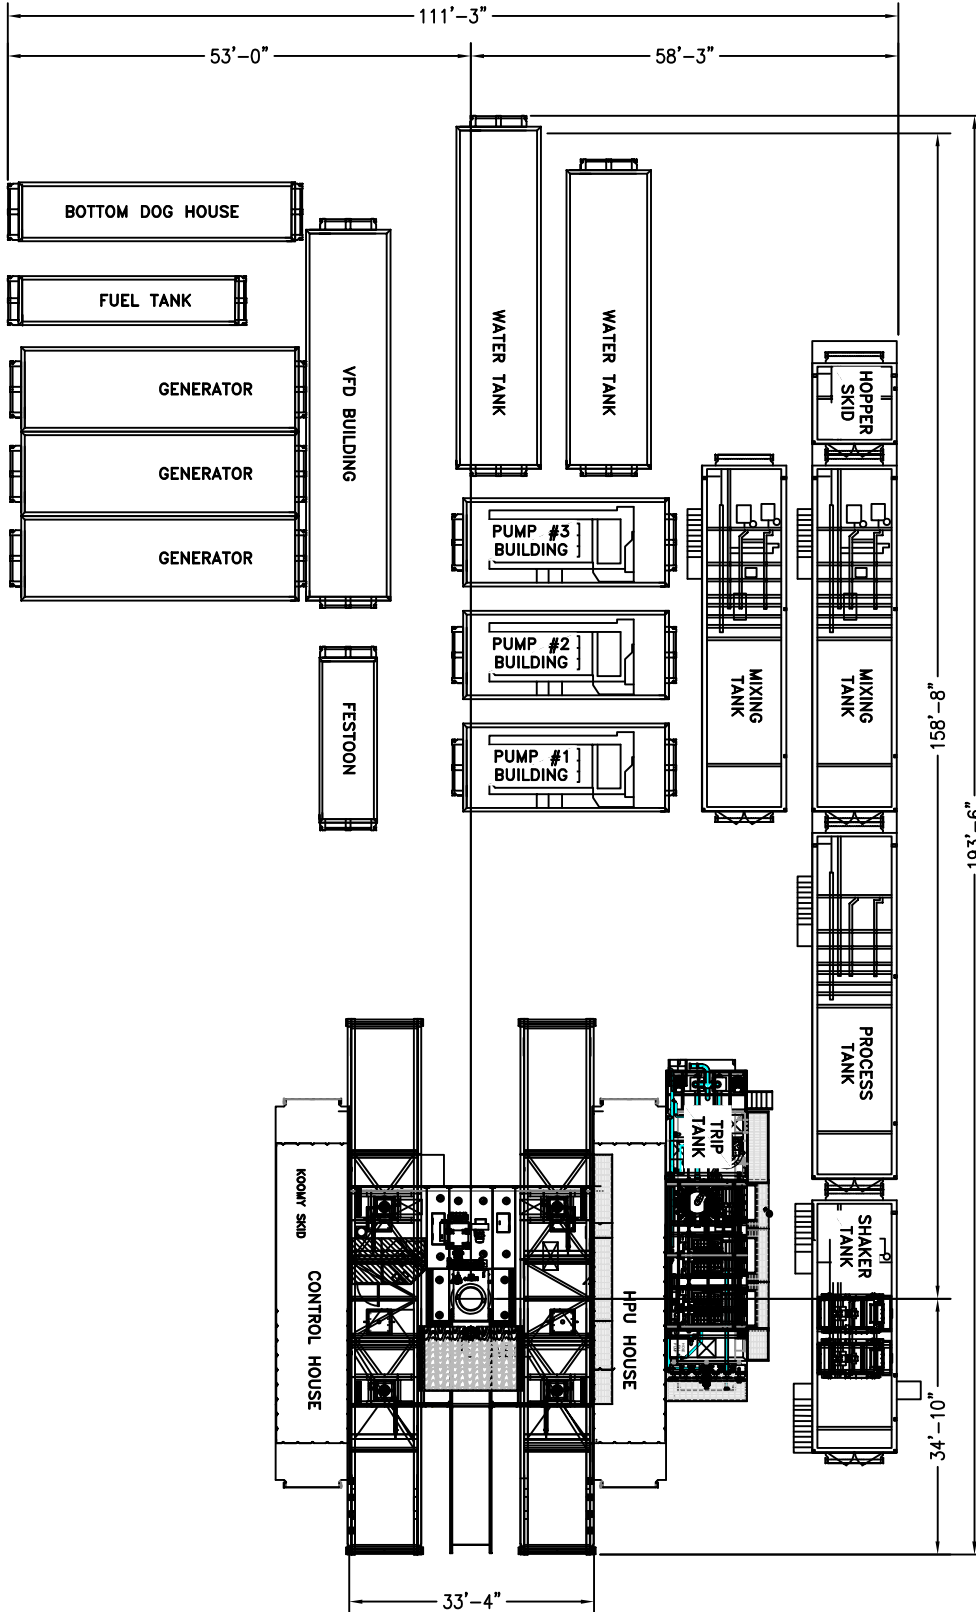

DRAWWORKS

CANRIG COMMANDER 2000
 GE B22 AC 1150HP
 JOHNSON 68-HHH-OS BRAKE

SUBSTRUCTURE

IDS JACKKNIFE
 MAXIMUM SETBACK CAPACITY: 580,000LB
 FLOOR HEIGHT: 25'-5" CLEAR WORKING HEIGHT
 37 1/2" ROTARY TABLE
 PARKER HYDRAULIC MOTOR
 VERISTIC WALKING SYSTEM
 150FT WALKING DISTANCE IN X OR Y AXIS
 BOP HANDLER

MAST

IDS JACKKNIFE
 MAXIMUM HOOK LOAD: 1,000,000LB - 12 LINES

OVERHEAD EQUIPMENT

CROWN: (4) 50" CLUSTER, (1) 60" FASTLINE,
 (1) 42" DEADLINE, 1 3/8" DRILL LINE
 TRAVELING BLOCK: CAN RIG 500 TON
 RATED CAPACITY: 500 TON

TOP DRIVE

CAN RIG
 QUILL AND ELEVATOR LOAD PATH RATING 500 TON
 51,400 FT-LBS CONTINUOUS TORQUE RATING @ 120RPM
 MAX TORQUE 71,000 FT/LBS
 MAX RPM 265 @ 23,500 FT/LBS
 RATED 7,500PSI

(x3) MUDPUMPS (AC)

(3) 1600 TRIPLEX 7,500PSI
 1600HP AC EACH

MUDTANKS (x4)

GROSS VOLUME 1400BBL
 (x3) LINEAR MOTION SHALE SHAKERS
 (x1) DESANDER
 (x1) DESILTER
 (x1) MUD GAS SEPERATOR (32.3BBL)
 (x2) CHEMICAL MIXING HOPPERS
 (x1) CAUSTIC MIXING SYSTEM
 (x2) 6x8x11 CENTRIFUGAL PUMPS

B.O.P.'S (NACE)

13 5/8"-5,000psi ANNULAR PREVENTOR
 13 5/8"-10,000psi DOUBLE GATE

MANIFOLD (NACE)

10,000psi CHOKE MANIFOLD

ACCUMULATOR

KOOMEY STYLE: 6-STATION ACCUMULATOR SKID

GEN SETS

(x3) CATERPILLAR 3512C W/ KATO AA27647015
 1950kVa 1365KW/60HZ

MISC

(2) 500BBL WATER TANK
 (2) 5000GAL DIESEL TANK
 HYDRAULIC OPERATED CATWALK
 RIG WALKING SYSTEM
 TM-80 IRON ROUGHNECK

TUBULARS

DRILL PIPE: 4 1/2" IF (NC50) G-105,16.6LB/FT
 DRILL COLLAR: 6" x 4 1/2" XH (NC46) 550FT
 DRILL COLLAR: 8" x 6 5/8" REG (NC-56) 560FT
 DRILL COLLAR: 5" x 4 1/2" IF (NC-50) 576FT