




RIG 4

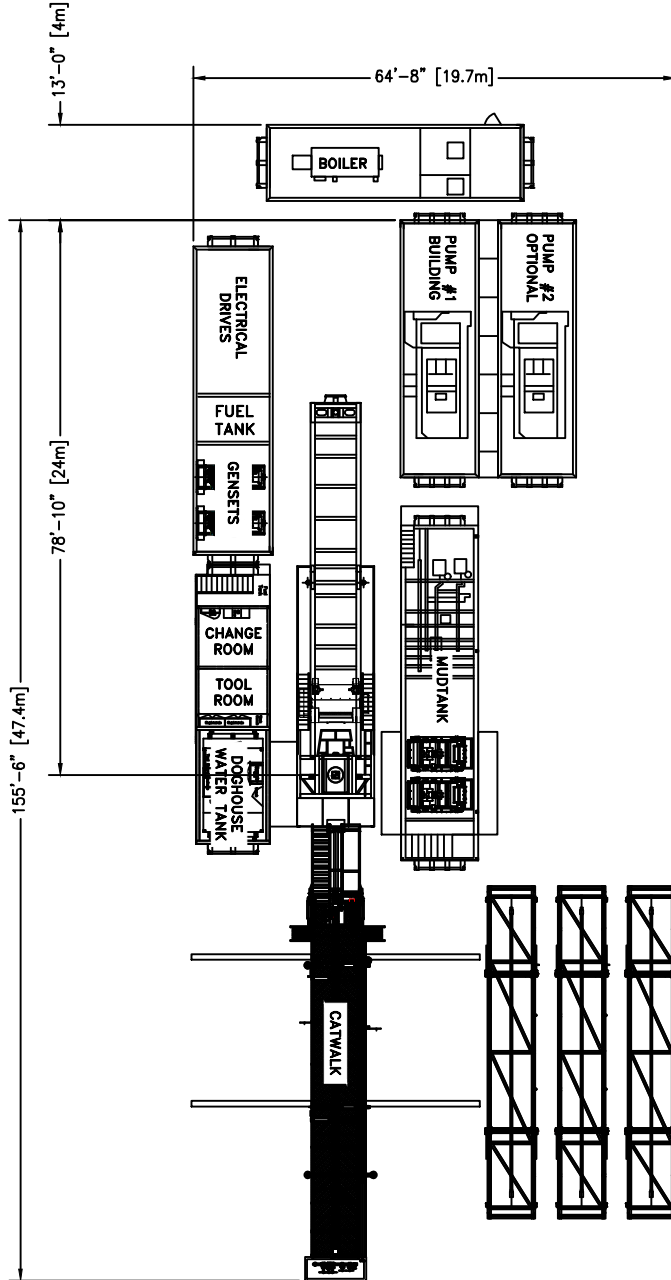

9,100FT (2800m)
W/ 4" DRILL PIPE
STIFF MAST RING III SINGLE
5,000psi CIRCULATING SYSTEM

DRAWWORKS
RIGMASTER E30AC
OEM 600HP AC TRACTION MOTOR

SUBSTRUCTURE
FOREMOST TRAILER
ROTARY CAPACITY: 88,960daN (200,000LB)
FLOOR HEIGHT: 3.35m (11'-0")
ROTARY TABLE: ENID 406mm (16") HYDRAULIC FOR POSITIONING
DETROIT S60 HPU

MAST
24.6m (80') FOREMOST TWIN BOOM RING III
RATING: 102,300daN (230,000LB) 6 LINES

OVERHEAD EQUIPMENT
FOREMOST 150 TON INTEGRATED BLOCK

TOP DRIVE
FOREMOST 150T HYDRAULIC
TORQUE: 21,000FT/LBS LOW GEAR, 6,000FT/LBS HIGH GEAR

MUDPUMPS (x2)
(1) MD-9 1000HP
1150HP AC TRACTION MOTOR VFD DRIVE
(2) MD-9 1000HP
DETROIT 12V2000

MUDTANKS
TOTAL VOLUME: 65m³ (400BBL)
4 COMPARTMENTS
2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS
SHAKERS: (2) MI SWACO MONGOOSE

B.O.P.'S/MANIFOLD
279mm (11")
RATING: 21,000kpa (3,000psi)
NACE TRIM
50.8mm (2") x 35,000kpa (5,000psi) MANIFOLD
76.2mm (3") GUTLINE

GEN SETS (2)
DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR
500kw 600v 100amp SERVICE
1000HP VFD PUMP DRIVE
600HP VFD DRAWWORKS DRIVE

ACCUMULATOR
MANUFACTURER: CONTROL TECHNOLOGY
21,000kpa (3,000psi)
5-FUNCTION, 2-STATION PLC

BOILER
MANUFACTURER: SASKATOON
100HP DOUBLE PASS
6,000L (1600GAL) FUEL STORAGE

MISC
FUEL CAPACITY: 18,500L (4,900 GALLONS)
WATER TANK CAPACITY: 50m³ (315BBL)
LOADER ACCESSIBLE PIPE TUBS
HYDRAULIC CATWALK W/ POWERED SKATE
LOADER
PIPE SPINNER

TUBULARS
DRILL PIPE: 101.6mm (4") 4"FH (NC40),
24kg/m (15.7LB/FT) X-95, 80 JOINTS RING III
HW DRILL PIPE: 101.6mm (4") 4"FH (NC40),
44kg/m (29.7LB/FT), 35 JOINTS RING III
HW DRILL PIPE: 101.6mm (4") 4"FH (NC40),
44kg/m (29.7LB/FT), 35 JOINTS RING III
DRILL COLLARS: 159mm (6 1/4") 4 1/2" XH (NC46),
136kg/m (92LB/FT)